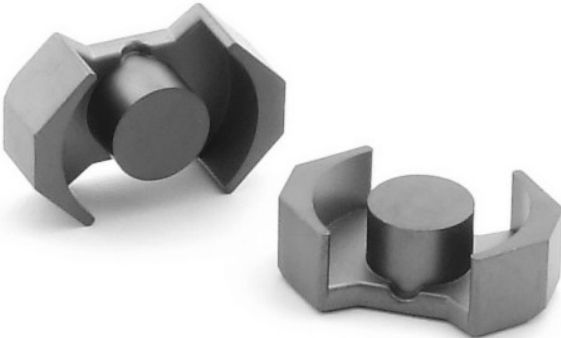


CUSTOMER R3Tec GmbHDATE 2015-6-13


SPECIFICATION FOR APPROVAL

CUSTOMER P/N	
FERRIWO P/N	FW40-RM8
SPEC.NO.	FSN150613ABD
CORE SHAPE	

APPROVED BY:

2. ELECTRICAL CHARACTERISTICS

1. DIMENSIONS(mm)

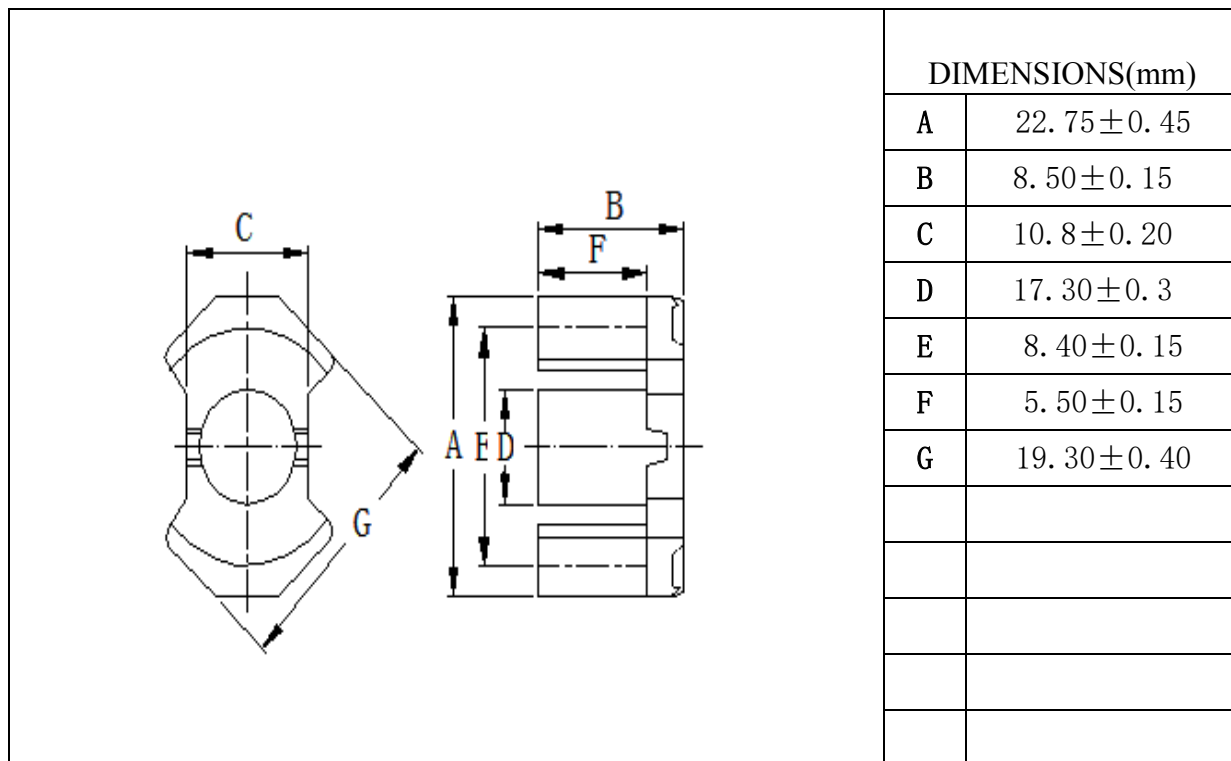

CORE PARAMETERS	
Effective Length L_e	38.0mm
Effective Cross Area A_e	64.0mm ²
Effective Volume V_e	2400mm ³
Approx. Weight W	13.8g/Prs

Item:	P/N:	SPEC./N
FERRITE CORE	FW40-RM8	FSN150613ABD

ITEMS	SPEC	TESTING METHOD	TESTING INSTRUMENT
INDUCTANCE	AL: 2950±25% nH/N ²	1kHz,0.3V 25±3℃,N=20Ts	JS2810

3.MATERIAL CHARACTERISTICS

MATERIAL: FW40

CHARACTERISTICS		UNIT	VALUE
INITIAL PERMEABILITY	μi	—	2300±25%
SATURATION MAGNETIC FLUX DENSITY (H=1194A/m)	Bs	mT (25/100℃)	470
			350
REMANENT FLUX DENSITY	Br	MT (25/100℃)	100
COERCIVE FORCE	Hc	A/m (25/100℃)	14
RELATIVE LOSS FACTOR	Tanδ/ui	—	(100kHz)
RELATIVETEMP.FACTOR	αuir	—	
CURIE TEMP.	Tc	℃	220
ELECTRICAL RESISTIVITY	ρ	Ω	6.5
DENSITY	d	kg/m ³	4.8×10 ³
Item:	P/N:	SPEC./N	
FERRITE CORE	FW40-RM8	FSN150613ABD	

4. Maximum chip off:

a.

The depth of crack in the ground surface should be no more than 0.3mm, length is no more than 1/4 length of lengthen line. In the non-ground surface, the depth should be no more than 0.5mm length is no more than 1/3 length of lengthen line.

b. 对于磁芯的外观检验方面，执行如下标准规格：

		接合面	其他表面
破损	1 处破损的面积	≤0.7mm ²	≤1.0mm ²
	2 处以上破损面积的合计	≤2.0mm ²	≤5.0mm ²
	破损深度	≤0.7mm	≤1.0mm
其他	实际使用中无有害毛刺，裂纹，气孔等		

5. (Inspection Method) :

According to GB/T2828.1-2003.one time normal random sampling,Inspect level II ,AQL.should be as follows;

	AQL	Inspect Item
A	0.65	Electromagnetic Property
B	1.0	Outside Size
C	1.5	Outside Quality

6.Packing:

plastic sack is used to inside packing,paper box is used to outside packing,Qualify Certification is attached on every box,including Item (Product name or type),Quantity,Lot No.and Tester.

6.2.QTY in carton

Item	(PRS/CTN)	Remark
FW40-RM8		

Item:	P/N:	SPEC./N
FERRITE CORE	FW40-RM8	FSN150613ABD